



Envirobase[®] High Performance Waterborne Thinner Selection Guide

Below 30% Relative Humidity

TEMPERATURE

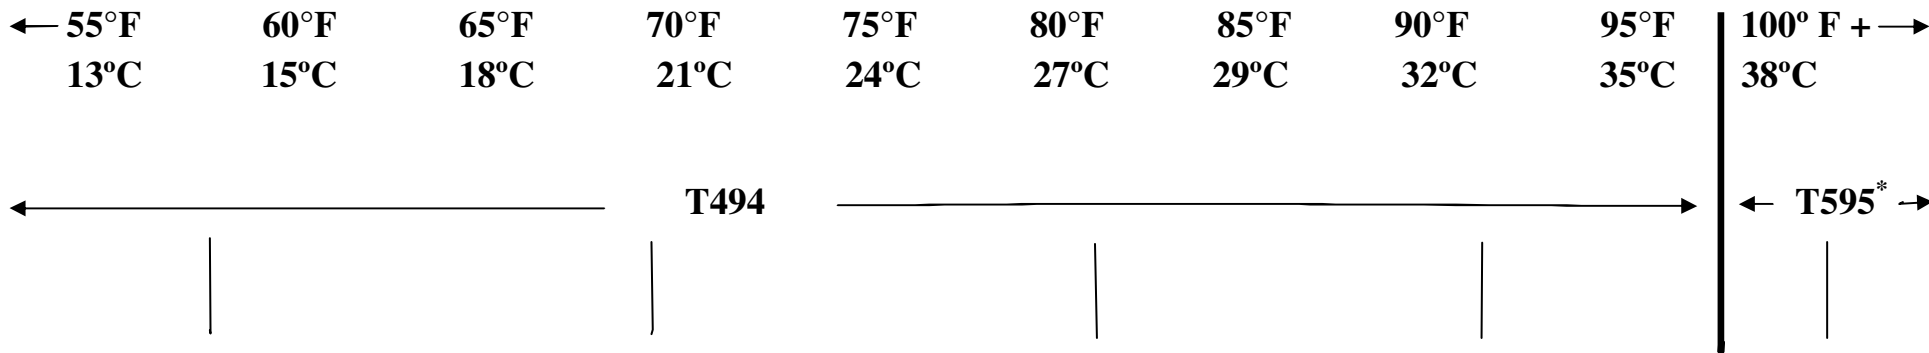

Above 30% Relative Humidity

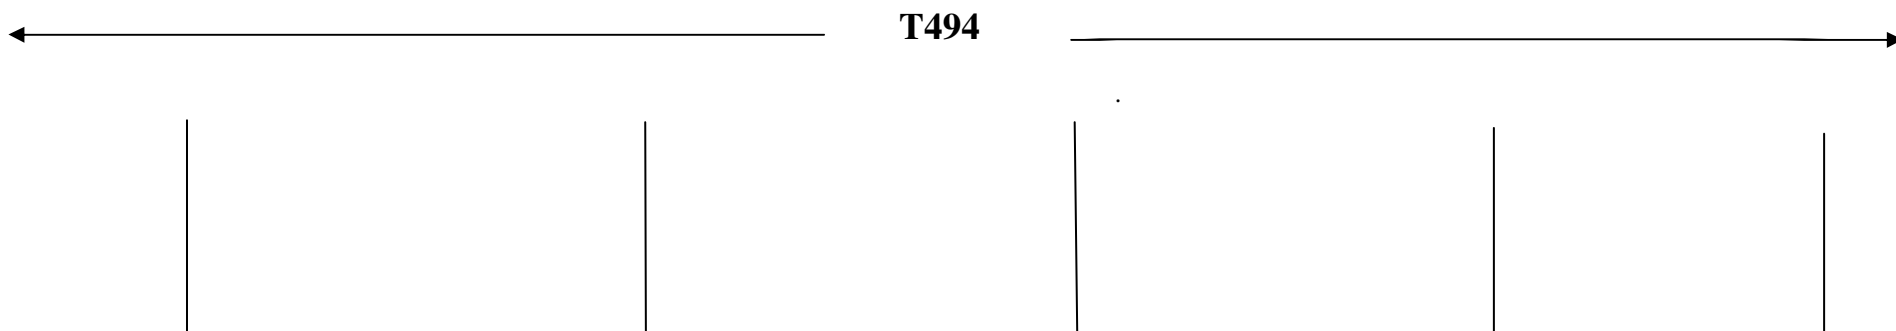

* Note: Using T595 waterborne thinner with humidity levels above 30% can cause extremely slow flash and overall drying of the basecoat. Do not blend waterborne thinners as this will affect overall basecoat performance. Use either T494 or T595 depending on humidity.